


# 1000 SERIES

Ceiling Mounted Darkroom Safelights

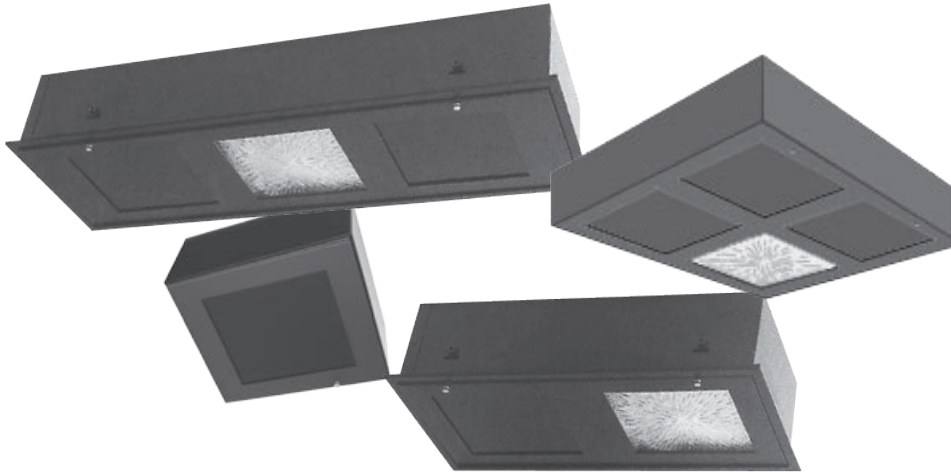

## DARKROOM SAFELIGHT


- Ceiling Recessed.
- Uses Kodak Safelight Filters
- Easy to Install
- Hose Down



Sealed reflector to insure no stray light can escape and expose film.

## Specifications

- 20-gauge cold-rolled steel housing, welded construction
- Light-sealed steel access panel with piano hinge
- Multiple compartment models include a prismatic, tempered glass lens for normal & dark room lighting in a single fixture
- Uses 200 Watt A-23 lamp (by others) for general illumination
- Filter compartment uses 15 Watt A-15 lamp (by others)
- Housing powder painted in black matte finish
- Filter compartment uses Kodak Safelight Filters
- Stainless steel access panel available.
- Luminaire will not fog photographic material during normal handling and processing time.
- Maximum illumination level to which material being processed has the least sensitivity.
- Fixture is to be sealed to protect from light leaks.
- Safelight will house Eastman Kodak safelight filter.
- Housing and door frame to be matte black to eliminate possible reflected light.
- Luminaire to be Vista's 1000 Series ceiling mounted darkroom safelight.
- **Listings/Certifications:** ETL (US/Canada)

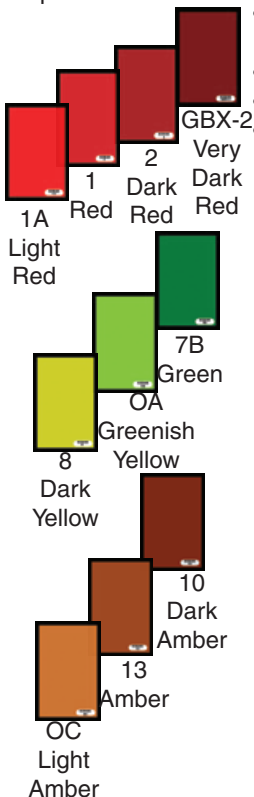

Eastman Kodak safelight filters  
Colors representative, not actual.

**Vista's Darkroom Safelight** will not fog or otherwise cause a visible change to light-sensitive photographic material during normal handling and processing. With the appropriate filter, they provide the maximum illumination to which the photographic material being processed has the least sensitivity. The Darkroom Safelight does not provide ambient illumination for any other activity than processing film. Safelight filter colors are determined by the material being processed, what spectrum of light it is sensitive to and the film speed. Vista Lighting cannot recommend filter colors. Some films can be processed with more illumination than others while some require complete darkness. Safelight filters gradually fade with use and must be periodically replaced.

**NOTE: KODAK RECOMMENDED MAXIMUM LAMP WATTAGE: 15WATTS. HIGHER WATTAGE MAY MELT FILTER.**

### Specifier's Reference

Project Name	Type
Catalog No.	
Comments	



# 1000 SERIES

Ceiling Mounted Darkroom Safelights


## Ordering Information

Series	Ceiling	Filter	Options
<div style="border: 1px solid black; width: 50px; height: 20px; margin-bottom: 5px;"></div> -1001 Single Gang <div style="border: 1px solid black; width: 50px; height: 20px; margin-bottom: 5px;"></div> -1002 Double Gang <div style="border: 1px solid black; width: 50px; height: 20px; margin-bottom: 5px;"></div> -1003 Three Gang <div style="border: 1px solid black; width: 50px; height: 20px; margin-bottom: 5px;"></div> -1040 Four Gang	<div style="border: 1px solid black; width: 30px; height: 20px; margin-bottom: 5px;"></div> -G For T-Grid Ceiling <div style="border: 1px solid black; width: 30px; height: 20px; margin-bottom: 5px;"></div> -F For Plaster or Drywall ceiling <div style="border: 1px solid black; width: 30px; height: 20px; margin-bottom: 5px;"></div> -S Surface Mounted	<div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> -OA Greenish Yellow <div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> -OC Light Amber <div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> -1 Red <div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> -1A Light Red <div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> -2 Dark Red <div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> -3 Dark Green	<div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> -7B Green <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> -8 Dark Yellow <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> -10 Dark Amber <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> -13 Amber <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> -GBX-2 Dark Red -SS 20 Gauge Stainless Steel Housing, Brushed Stainless Steel Door -SD 20 Gauge Brushed Stainless Steel Door -TP Tamper Proof Screws and Tool -PF Plaster Frame


## Mounting & Dimensions

1 GANG	SURFACE	GRID	FLANGE
A	10-11/16"	11-13/16"	10-3/8"
B	6"	6"	6"
OA	10-5/8"x10-7/16"x6"	11-13/16"x11-13/16"x6"	10-3/4"x10-3/4"x6"


CEILING OPENING




Flange/Grid



Surface




Flange/Grid




Surface

2 GANG	SURFACE	GRID	FLANGE
A	22-11/16"	23-13/16"	22-3/4"
B	6"	6"	6"
OA	22-5/8"x10-7/16"x6"	23-13/16"x11-13/16"x6"	22-3/4"x10-3/4"x6"

CEILING OPENING

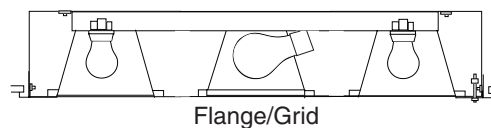

Flange/Grid




Surface

3 GANG	SURFACE	GRID	FLANGE
A	34-11/16"	35-13/16"	34-3/4"
B	6"	6"	6"
OA	34-5/8"x10-7/16"x6"	35-13/16"x11-13/16"x6"	34-3/4"x10-3/4"x6"

CEILING OPENING



Flange/Grid



Surface

4 GANG	SURFACE	GRID	FLANGE
A	22-7/16"	23-13/16"	23-1/8"
B	6"	6"	6"
OA	22-7/16"x22-5/8"x6"	23-13/16"x22-3/8"x6"	22-3/4"x22-3/4"x6"

CEILING OPENING

# VISTA

a Genlyte company 1805 Pittsburgh Ave, Erie, PA 16502 • 800-576-2135 • Fax 800-576-2136 • www.vistalighting.com